


Top View

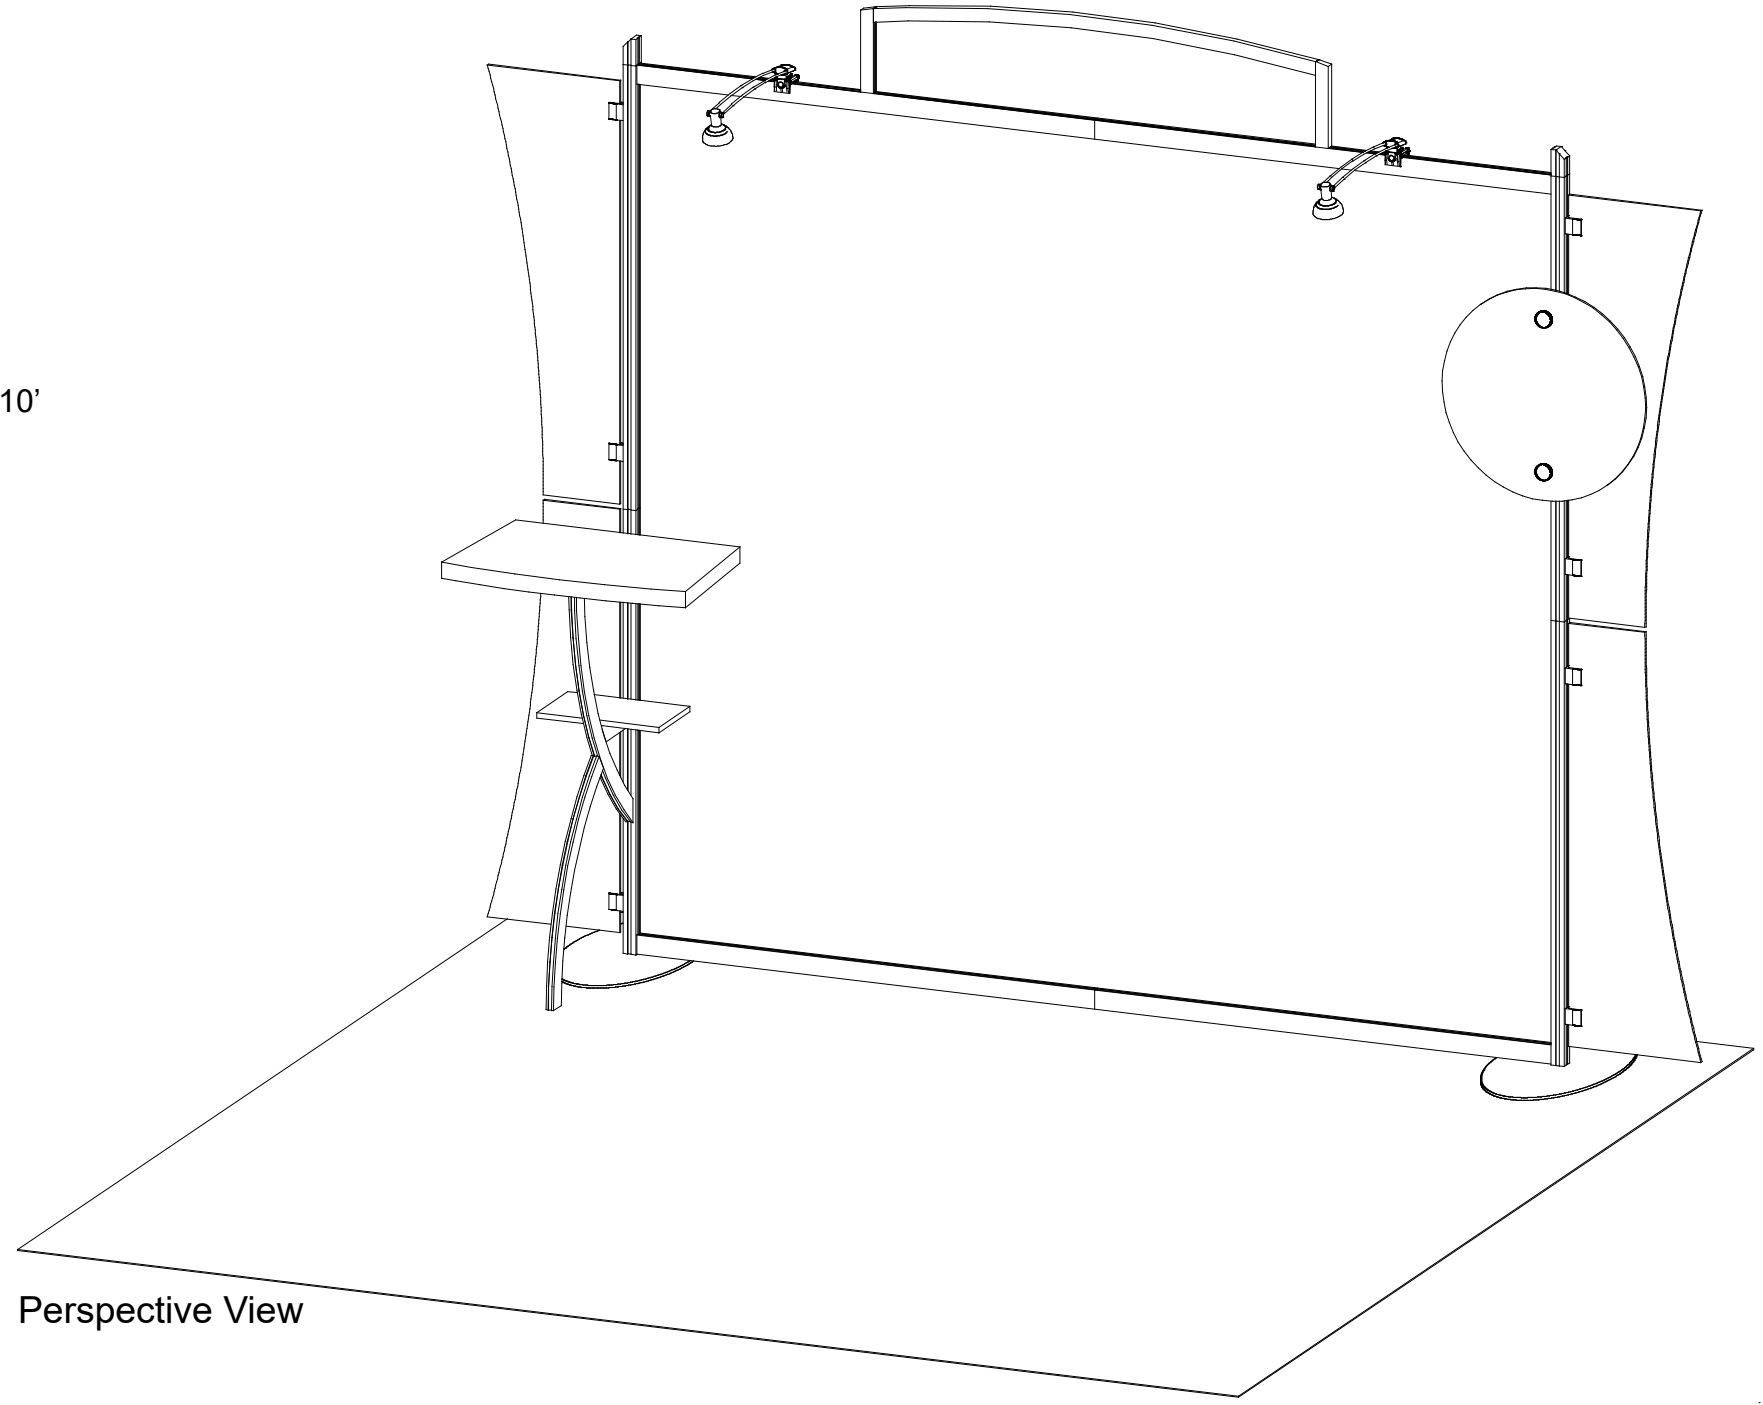

Perspective View

## General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

## Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure. **Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

## Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

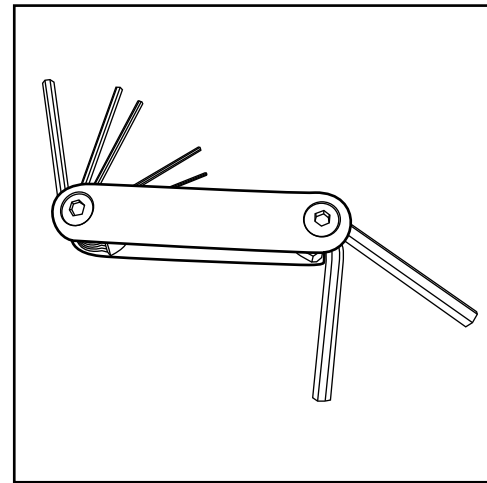


Hex Tool - Essential for Assembly

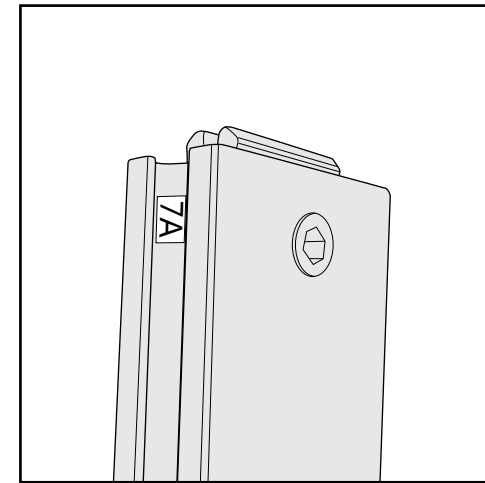


Part Identification - Numbering

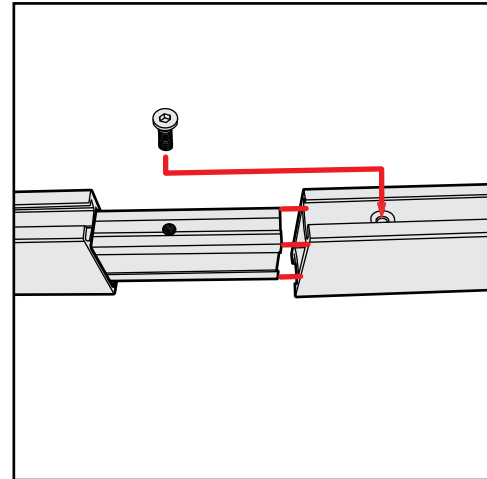


Spline Connection

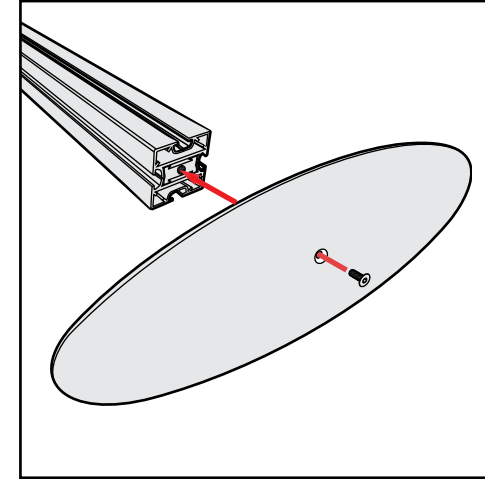

Base Plate & Extrusion Connection

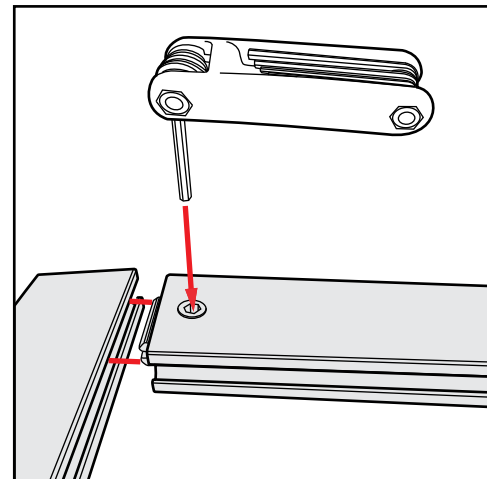

Extrusion & Lock Connection

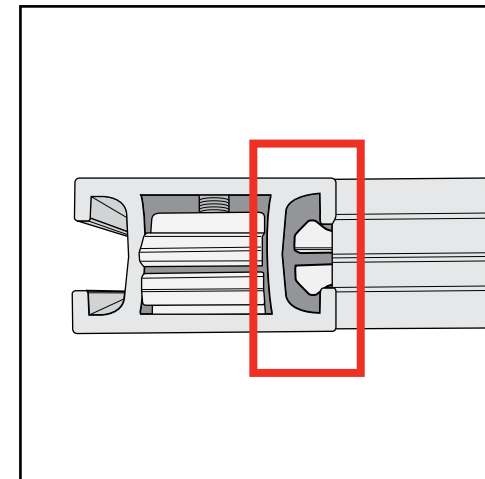


Engaged Lock



**WARNING**



DO NOT USE POWER TOOLS




LADDERS OR LIFTS  
MAY BE REQUIRED




ALL CONNECTIONS MUST  
BE TIGHTLY SECURED


### Top View of Each Level

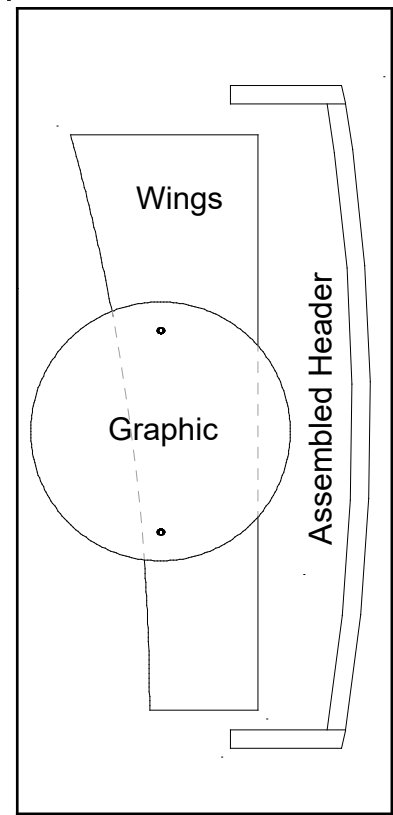

Level 1 (Bottom Level)

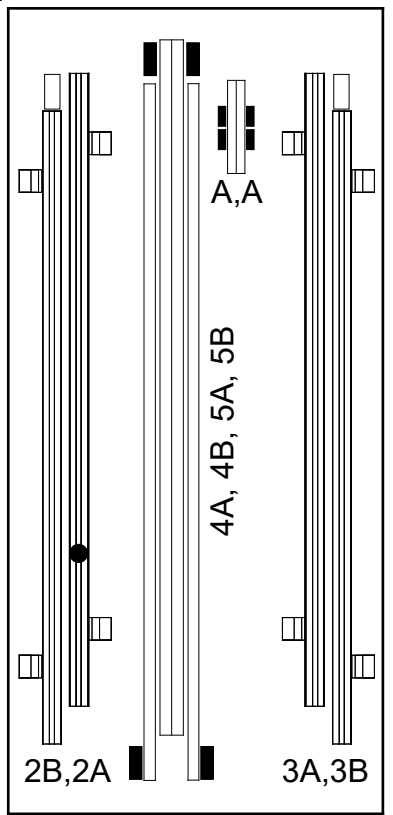

Level 2

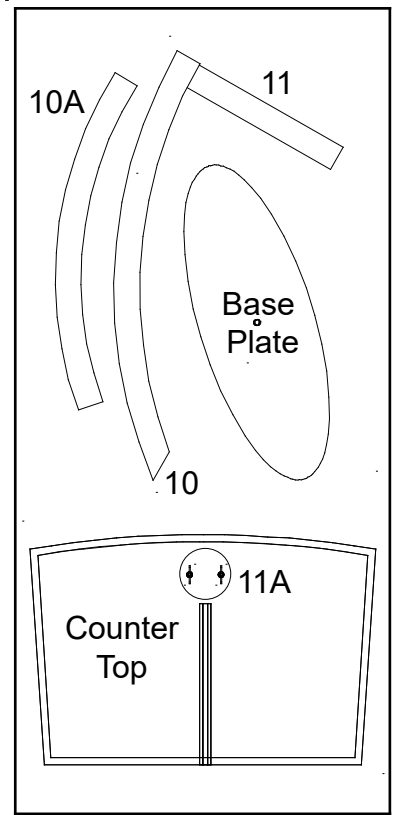

Level 3

Lights


Graphic

Setup Hardware  
w/ Shelf

Item	Qty.	Description
1	2	Base Plate
2A,2B	1,1	42" Vertical Extrusion w/ Clamps
3A,3B	1,1	42" Vertical Extrusion w/ Clamps
4A,4B	1,1	45" Horizontal Extrusion
5A,5B	1,1	45" Horizontal Extrusion
6A,6B	1,1	2.5" Angle-Cut Vertical Extrusion

Steps:

- 1) Attach base plates [1] to verticals [2A] and [3A], using bolts.
- 2) Connect verticals [2A to 2B] and [3A to 3B] with connection bars [B].  
See [Straight Connection with Knobs](#) detail.
- 3) Connect horizontals [4A to 4B] and [5A to 5B] with connection bars [A].  
See [Straight Connection with Knobs](#) detail.
- 4) Connect vertical assemblies [2A/2B] and [3A/3B] to horizontal assemblies [4A/4B] [5A/5B]. See [Corner Connection with Knob](#) detail.
- 5) Attach graphic to Velcro on back of assembled Backwall.

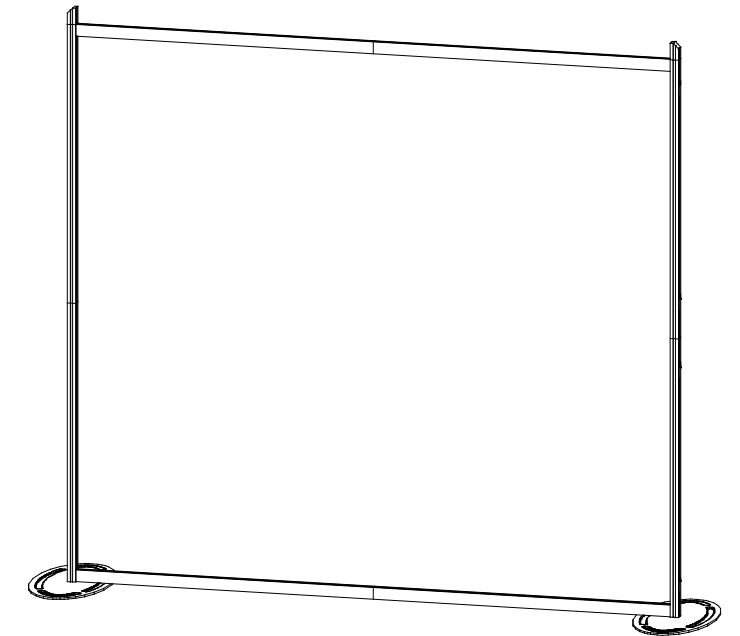

Completed Backwall Assembly


★ **Corner Connection with Knob**



Turn knob clockwise to tighten lock.


Do not over tighten Knobs

◇ **Straight Connection with Knobs**

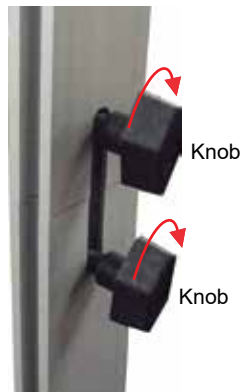

Slide connection bar between extrusions, then turn knobs clockwise to tighten lock.

Do not over tighten Knobs

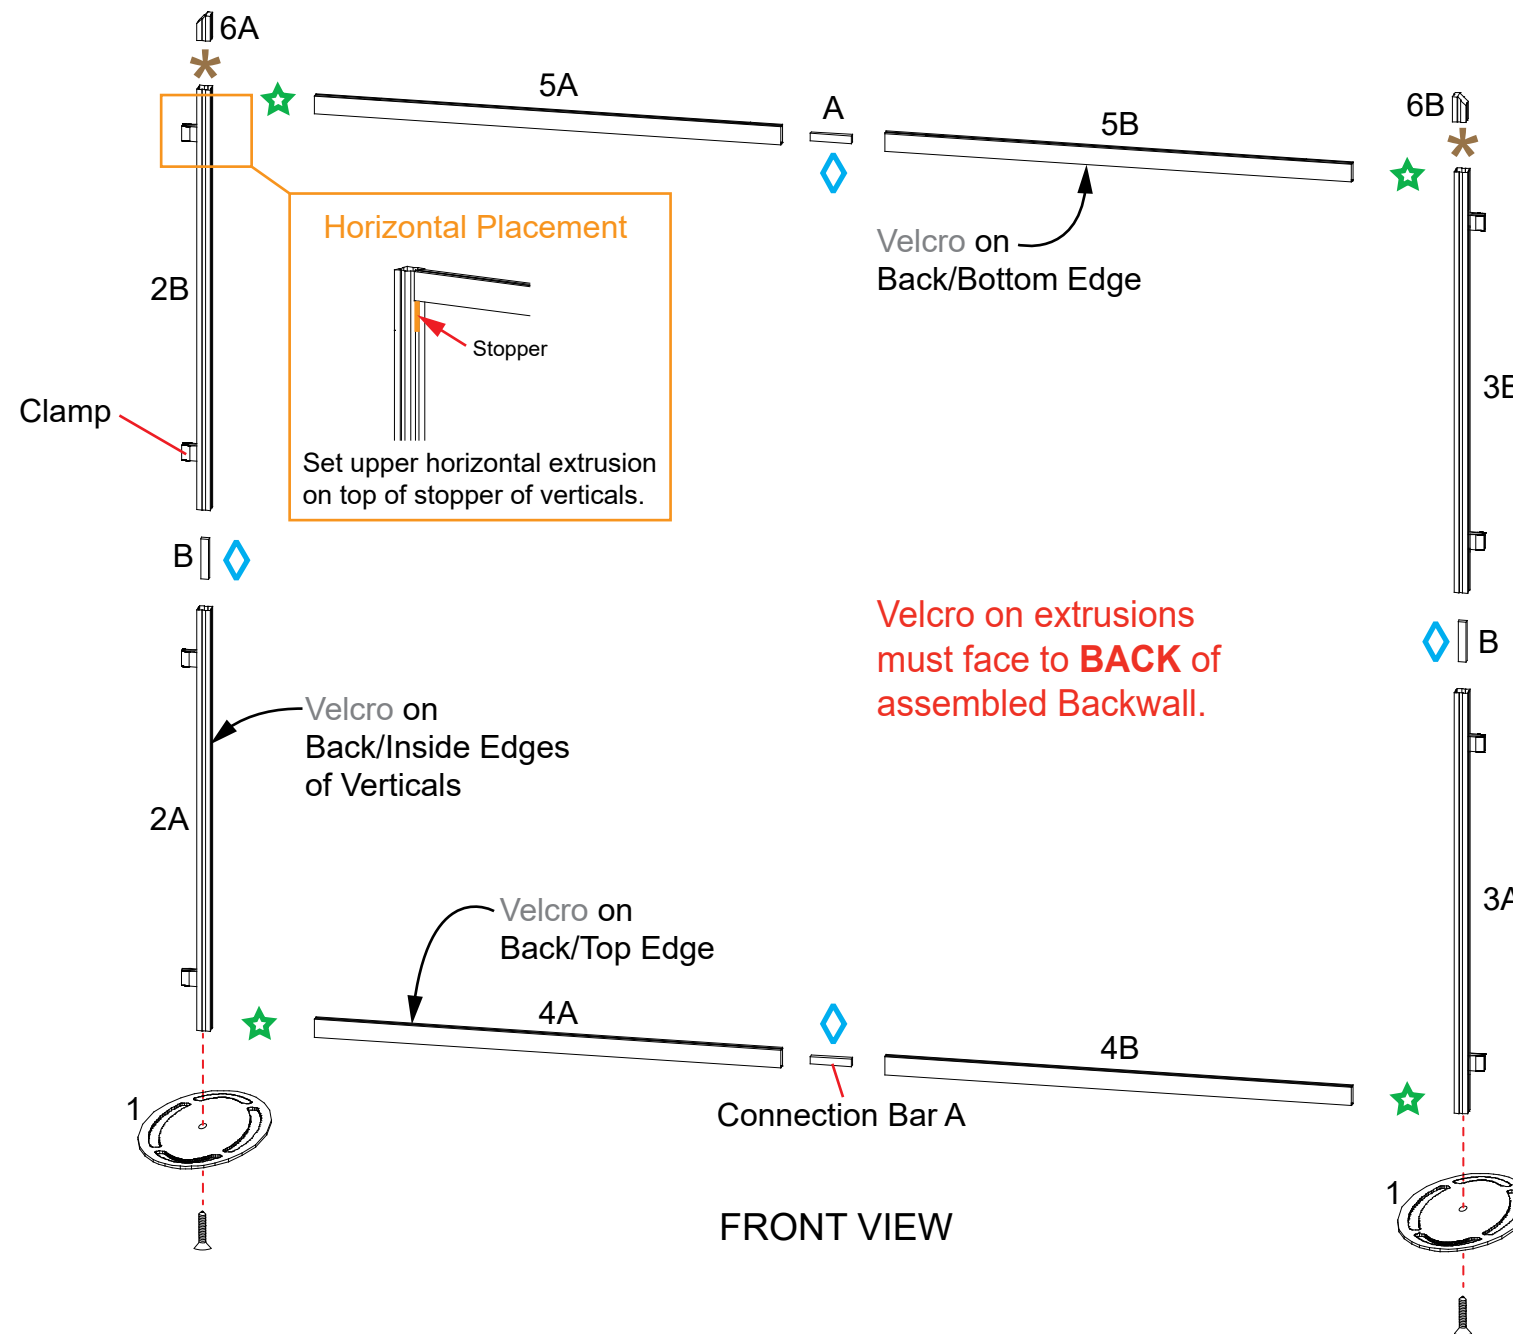


Velcro on extrusions must face to **BACK** of assembled Backwall.

Keep clamps attached to [2A] [2B] [3A] and [3B].

Keep [6A] attached to [2B] and [6B] attached to [3B].

Keep connection bars [A] attached to [4A] [5A] and [B] to [2A] [3A].

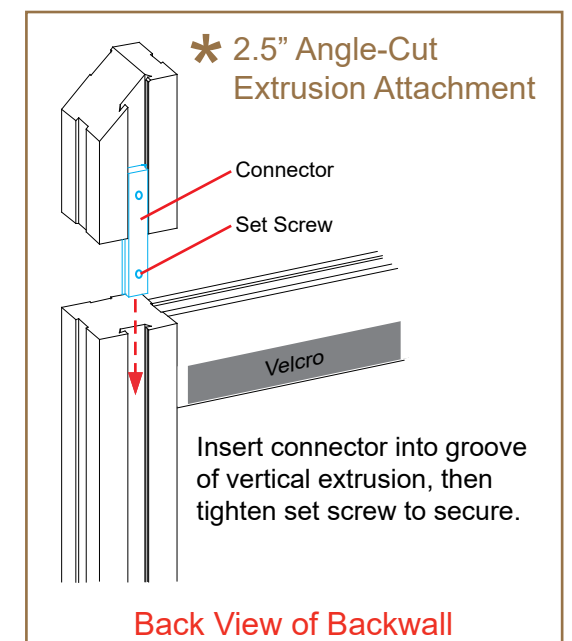

Back View of Backwall


Steps:

- 1) Connect lights to [5A/5B]. See **Light Connection** detail.
- 2) Attach assembled header frame [7/8/9] to [5A/5B].
- 3) Attach fabric graphic to Velcro on back of assembled header.
- 4) Attach counter support [10/11] to [2A].
- 5) Attach support leg [10A] to counter support [10/11].
- 6) Attach shelf to extrusion [2A].
- 7) Attach counter to mounting plate [11A]. See Counter Attachment sheet.
- 8) Route USB cords from counter. See USB Cord Management sheet.
- 9) Attach wings to clamps on [2A/2B] and [3A/3B]. See **Clamp Attachment** detail.
- 10) Attach graphic to [3B]. See **Graphic Attachment** detail.

Item	Qty.	Description
7/8/9	1/1/1	Assembled Header Frame
10A	1	Support Leg
10/11	1/1	Assembled Counter Support
11A	1	Mounting Plate

Keep [7] [8] and [9] assembled.


Velcro on extrusions must face to **BACK** of assembled Backwall.

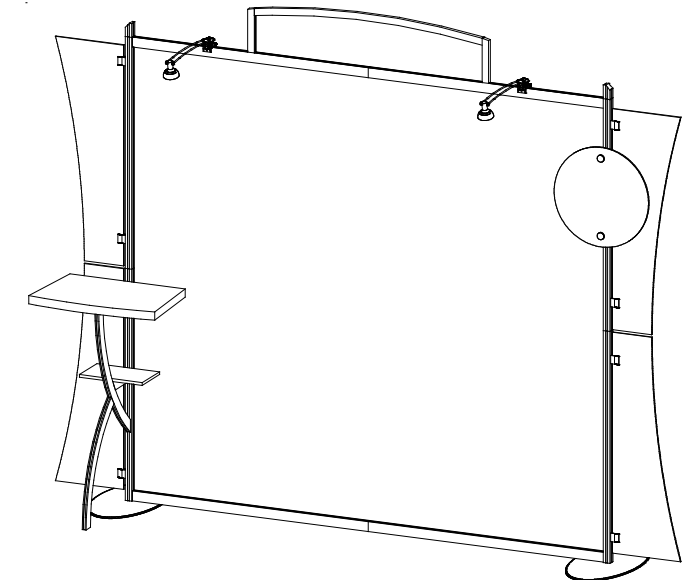

Completed Assembly

**\* Graphic Attachment**

Slide connector into groove of extrusion. Tighten set screws to secure in place. Screw standoff into connector. Place graphic between standoff and cap then tighten cap to secure graphic.

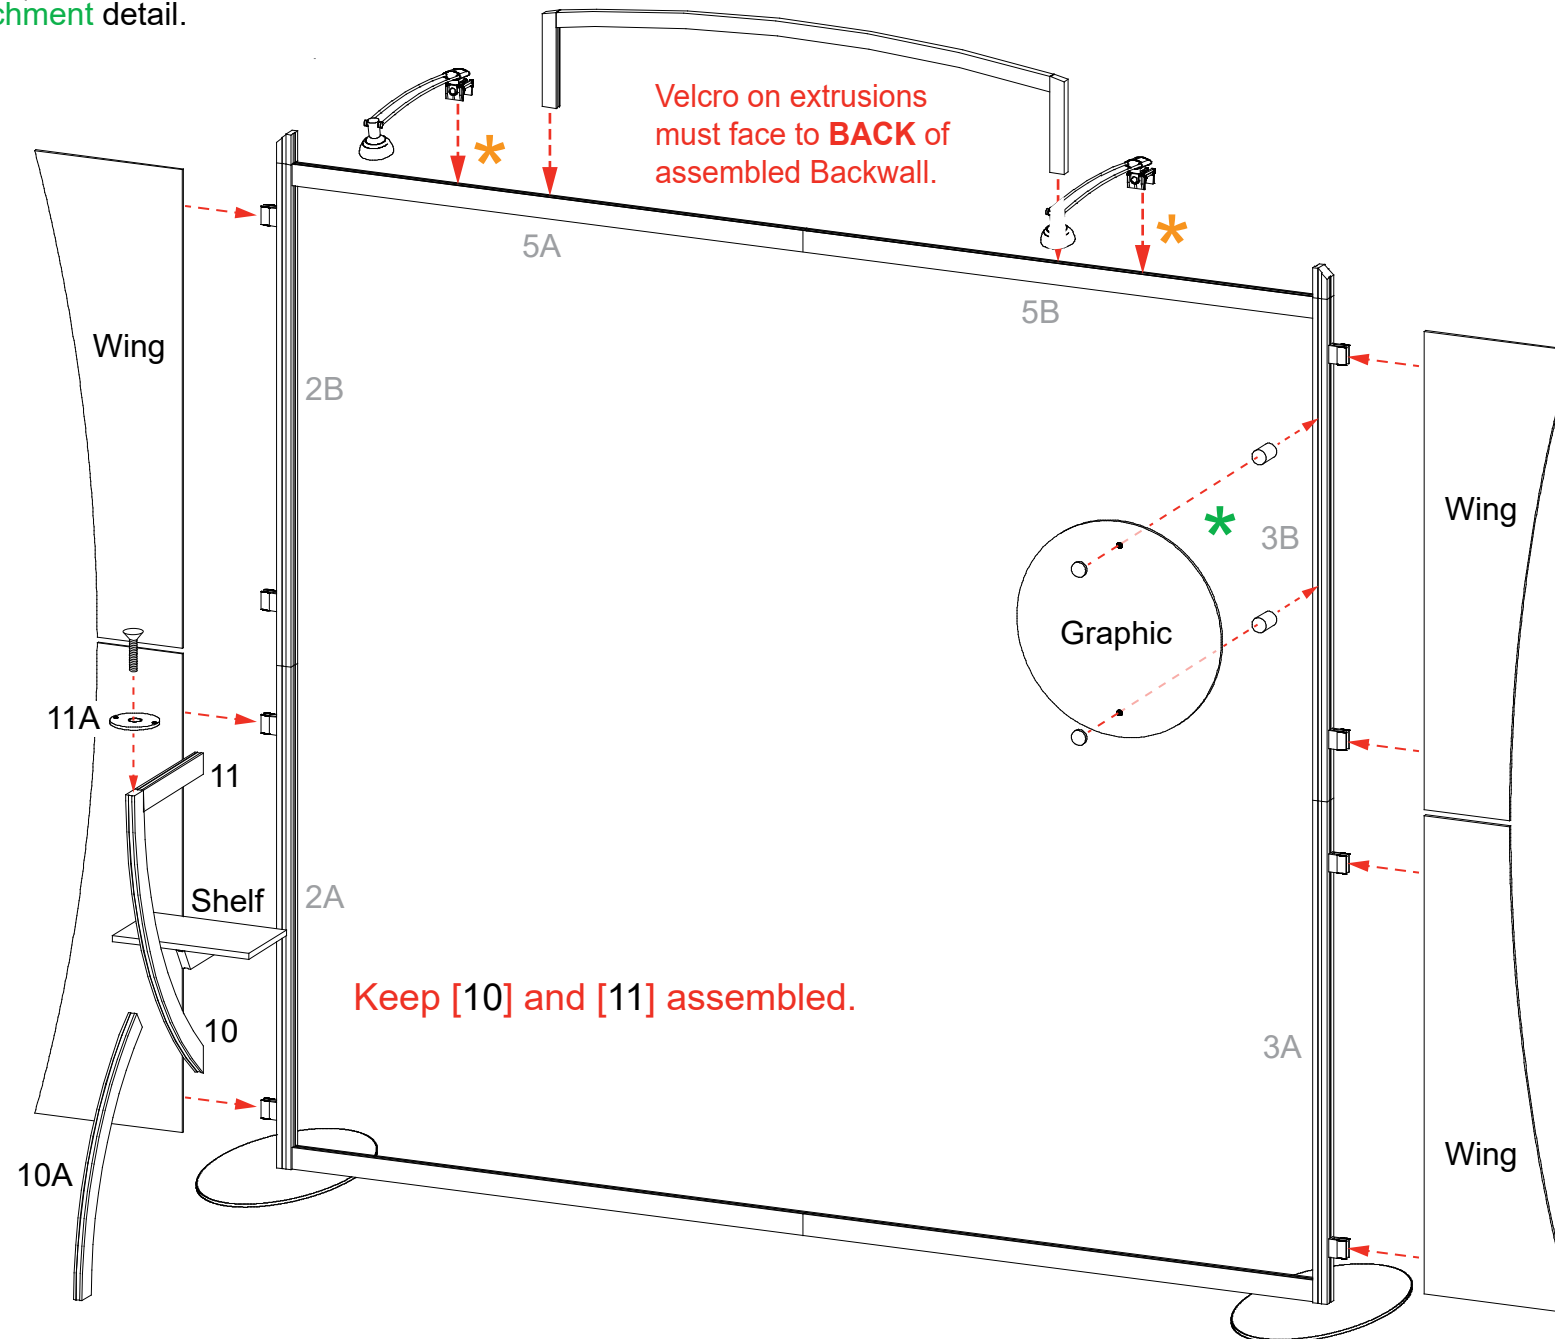

**\* Light Connection**

Slide light onto clip then lock clip into groove of horizontal extrusion.

**Clamp Attachment**

Slide connector, located on back of clamp, into groove of extrusion. When desired location is found, tighten set screw to secure.

Keep clamps attached to verticals, when packing.